



ASTROPHYSICS™

TOMORROW'S TECHNOLOGY FOR TODAY'S SECURITY



XIS-1517DV

Dual View Technology Pallet and Cargo Inspection



TRANSPORTATION

*Airport entrances and perimeters,
air cargo, and checkpoint technology.*



PORTS & BORDERS

*Border control, sea ports, and
other large cargo sectors.*



CRITICAL INFRASTRUCTURE

*Access control for prisons, courthouses,
mailrooms, hotel entrances and
military bases.*

The XIS-1517DV is a high capacity X-Ray Inspection System with extended tunnel dimensions 150 cm x 170.2 cm (59" x 67"). The XIS-1517DV utilizes two x-ray sources to generate two independent perspectives for increased object identification of large cargo and pallet inspection.

Featuring a heavy duty roller bed and rugged construction, the XIS-1517DV can support 2000 kg (4409 lbs). The XIS-1517DV consistently delivers outstanding performance and retains a high throughput value.

Matched with Astrophysics exclusive software and superior technology, the XIS-1517DV is the quality system for your large scale screening needs.

All Astrophysics X-ray Inspection Systems are equipped with Real-Time Diagnostics, a unique Astrophysics feature which allows users to monitor system health. This software was specifically engineered to save you valuable time and money. If requested, Astrophysics would also be able to connect to your system and troubleshoot any issues remotely.

An exclusive Astrophysics option is our 6 Color Imaging, which enables operators to view screened objects in 6 colors, each color correlating to a specific range of Atomic Z-Numbers. 6 Color Imaging enables operators to achieve optimal material identification which improves throughputs.

Astrophysics is committed to providing quality products and services nationwide. We listen to our customers and offer customizations and order flexibility based on their needs.

Backed by a team of engineers from our City of Industry, California center of excellence headquarters, Astrophysics designs cutting-edge X-ray screening technology for detecting weapons and contraband for transportation, ports, borders, critical infrastructure and other industries that present security risks.

Astrophysics is headquartered in the United States and maintains a global presence with service delivery worldwide. Astrophysics is committed to global safety and is proud to present this new age of screening security—driving the industry into the technology of tomorrow.





GENERAL SPECIFICATIONS

- Tunnel Size: 150 cm x 170.2 cm
(W x H) 59" x 67"
- Dimensions: 853.1 cm x 259.1 cm x 286.3 cm
(L x W x H) 335.9" x 102" x 112.7"
- Shipping Dimensions: 1x 294.6 cm x 143.5 cm x 251.5 cm
(L x W x H) 116" x 56.5" x 99"
- 3x 218.4 cm x 143.5 cm x 251.5 cm
86" x 56.5" x 99"
- 2x 203.2 cm x 190.5 cm x 81.3 cm
80" x 75" x 32"
- 1x 218.4 cm x 143.5 cm x 88.9 cm
86" x 56.5" x 35"
- Net Weight²: 4900 kg (10803 lbs)
- Shipping Weight²: 6500 kg (14330 lbs)
- Roller Bed Speed: 10 cm/s (20 ft or 6m/min) Forward or Reverse
- Roller Bed Height: 38.3 cm (15") from Floor
- Roller Bed Capacity: 2000 kg (4409 lbs) Evenly Distributed Load

TECHNICAL

- Wire Resolution: 40 AWG Typical, 38 AWG Standard
- Spatial Resolution: 1.3 mm Horizontal, 1.3 mm Vertical
- Steel Penetration¹: 39 mm Typical, 37 mm Standard
- Contrast Sensitivity: 24 Visible Levels, 4096 Gray Level
- Film Safety: Guaranteed up to ISO 1600 (33DIN)

X-RAY GENERATOR

- Voltage: Dual 180kV, Operating at 165kV
- Tube Current: Dual 1.2 mA
- Duty Cycle: 100%, No Warm-Up Procedure Required
- Beam Direction: Horizontally Sideward, Vertically Downward
- Detector: 4352 Channels in an L-Shaped Array

COMPUTER

- Processor: Intel® Core i5, 3.1 GHz, 6MB cache
- Memory: 4 GB RAM at 1333 MHz
- Storage: 500 GB HDD
- Video Card: 1 GB, Dual Digital Display
- Configuration: Multi PC Data Acquisition and Processing
- Platform: Windows® OS
- Backup: Uninterruptible Power Supply
(Computer Operation - 20 Minute)

VIDEO


- Display Type: Dual 24" LCD Color Monitors
- Display Resolution: 1600 x 1200; 24 Bit/Pixel Color

ENVIRONMENTAL

- Operating Temperature: 0°C - 40°C \ 32°F - 104°F
- Storage Temperature: -20°C - 60°C \ -4°F - 140°F
- Humidity: Up to 95% Non-Condensing

ELECTRICAL

- Power Requirements: 110VAC ± 10%, 50/60Hz, 15 Amp Max
220VAC ± 10%, 50/60Hz, 10 Amp Max

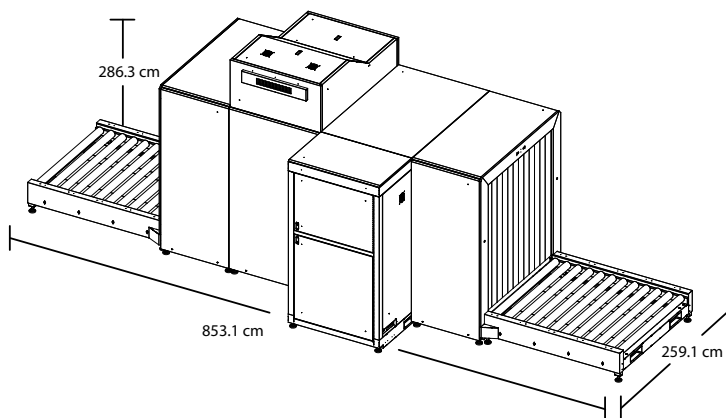

STANDARD FEATURES

- 6 Color Imaging
- 9 Quadrant Zoom
- Atomic Z-Number Measurement
- Auto Image Archiving (150,000)
- Baggage Counter
- Color and Black/ White Imaging
- Continuous Scanning
- Continuous Zoom up to 64x
- Vertical Zoom Panning
- Geometric Image Distortion Correction
- High Penetration Function
- Heavy Duty Roller Casters
- Image Annotation
- Image Review
- Manual Bitmap Archive
- Material Discrimination
- Multi-Tier Accessibility
- Network Ready
- Organic/ Inorganic Imaging
- Operator Training
- Picture Perfect
- Print Image Capable
- Pseudo Color
- Real-Time Image Manipulation
- Real-Time Self Diagnostics
- Reverse Monochrome

OPTIONAL FEATURES³

- Computer Based Training (CBT)
- Conveyor Capacity 3000 kg (6614 lbs) Evenly Distributed Load
- Custom Paint
- Density Alert
- Extended Entry/ Exit Roller Tables
- Footmat Operator Interlock
- Local Language Support
- Polar Kit
- Radiation Meter
- Remote Workstation Configuration
- Screener Assist Software
- Test Case
- Threat Image Protection (TIP) Software
- Tropical Kit
- Wireless Barcode Scanning

HEALTH AND SAFETY

- Compliant with USFDA, Center for Devices and Radiation Health Standards for Cabinet X-Ray Systems (21-CFR 1020.40)
- Typical radiation leakage is less than 0.1 mR/hr (Leakage less than 0.5 mR/hr permitted by the Federal Standard)



¹ As tested on Astrophysics Inc. Test Piece.

² Weight of the system may vary depending on customization.

³ Optional features may affect lead time price, and weight of XIS-1517DV. Please contact your Astrophysics Sales Representative for more information.

Due to continued product research and development, Astrophysics Inc. reserves the right to amend all technical specifications without prior notice.